

Features

- Dual 10 GigE LAN, up to 10Gbps data rate.
- Support 4G/5G communication function.
- Extension board only support for AX720.

Specifications

Dimension

- 120 x 90mm

Support Board

- AX720-STD-AN00

Board IO spec

- Dual Port 10G Base-T
- Data Rate Per Port: 10GbE/5GbE/2.5GbE/1GbE/100Mb
- Cabling Type: RJ45 Category 6 up to 55m; Category 6A up to 100m
- 1x M.2 B key support 3042 and 3050(USB 3.2 Gen2)
- 1x Nano Sim Slot
- 2x USB2.0 Type A

Operating Temperature

- 0 °C ~ +55 °C (Standard temperature)


Operating Humidity

- 10% ~ 90%

Storage Temperature

- -40 °C ~ +85 °C

ADM2B-720-NN05

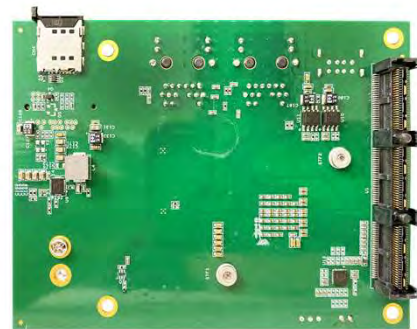

Ordering Information

Product name	Description
ADM2B-720-NN05	Daughter board for AX720, support dual 10G and 4G/5G function 0°C to +55°C

AVL List

Expansion Device				
Vendor	Product Number	Function	Form factor	Description
Telit	FN980m	5G/LTE	M.2 B Key	M.2 (NGFF) data-card, support of 5G Sub-6 FDD and TDD and mmWave, support of SA & NSA operations, 5G core network Opt. 3a/3x and Option 2
Telit	LN960	LTE CAT 18	M.2 B Key	M.2 (NGFF) data-card, up to 1.0Gbps, 5xCA ,4x4 MIMO,